

1/17

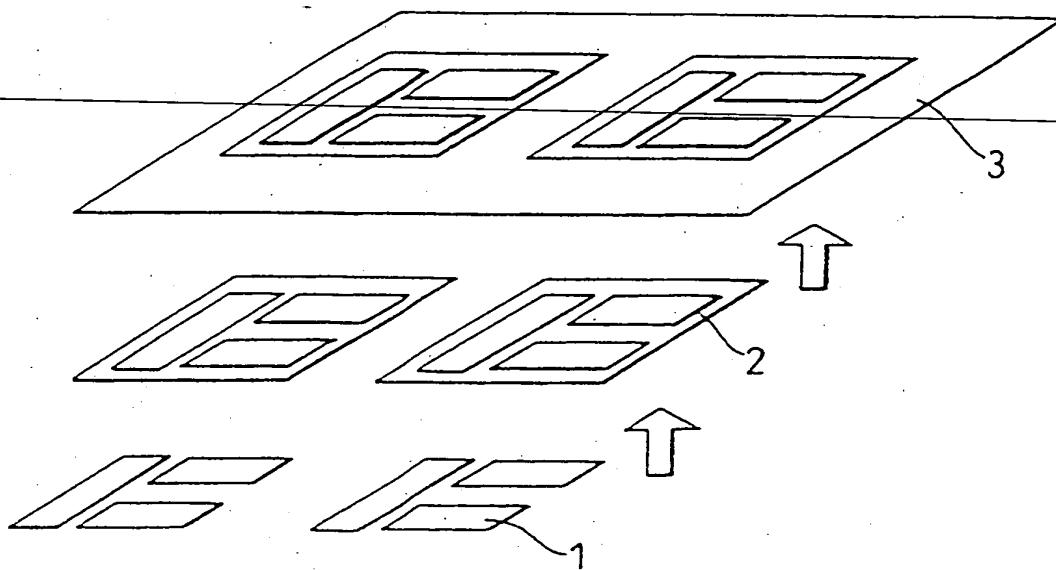


Fig. 1

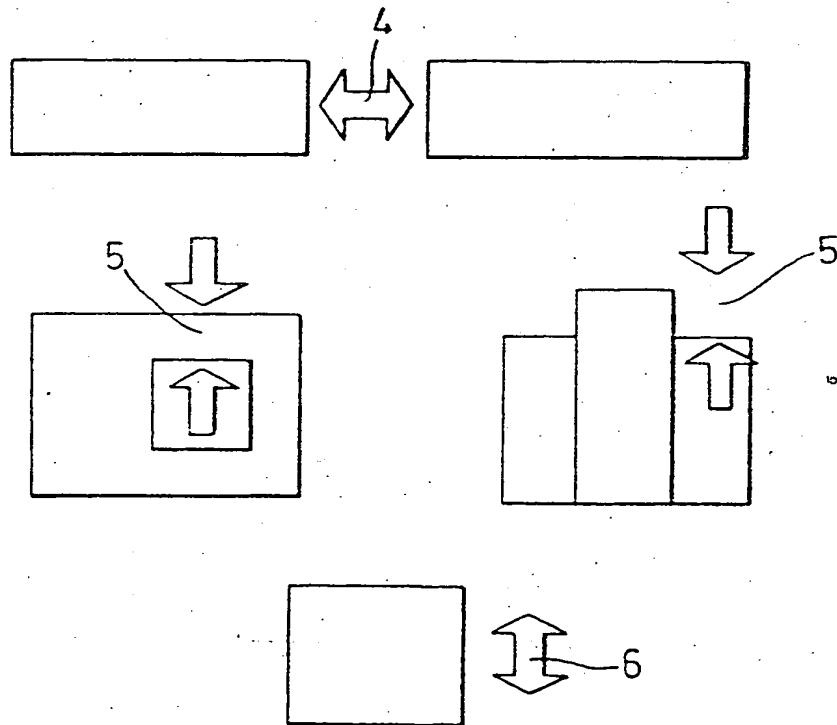


Fig 2

SUBSTITUTE SHEET (RULE 26)

2/17

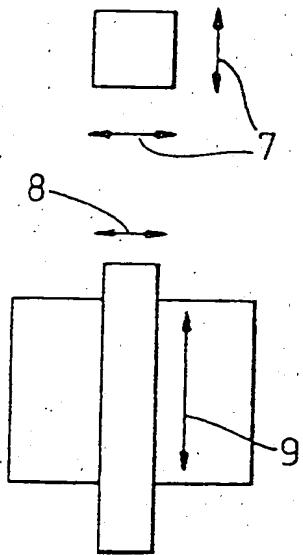


Fig. 3

3/17

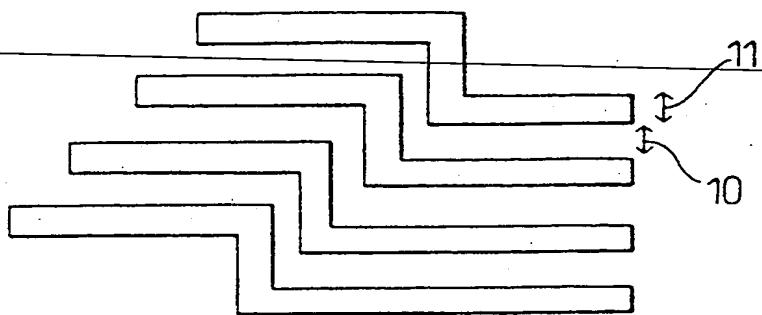


Fig. 4

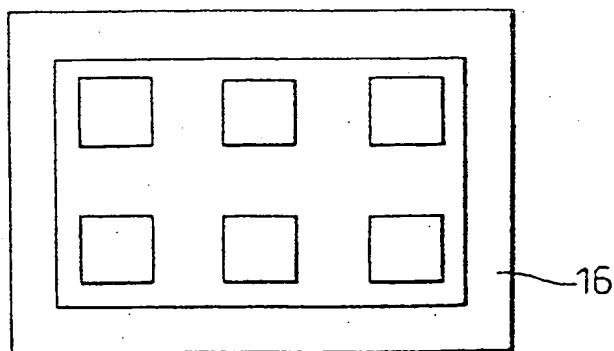
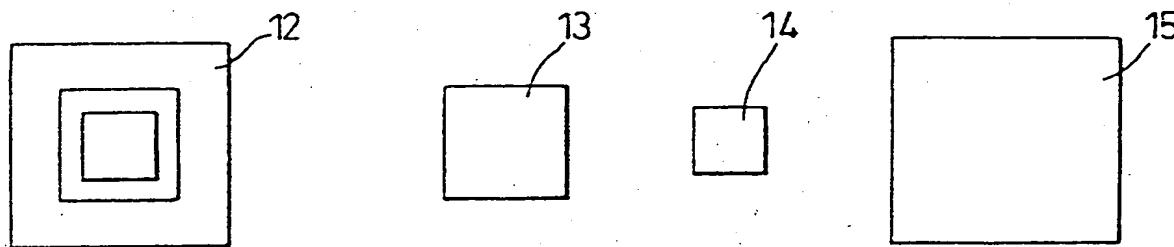


Fig. 5

4/17

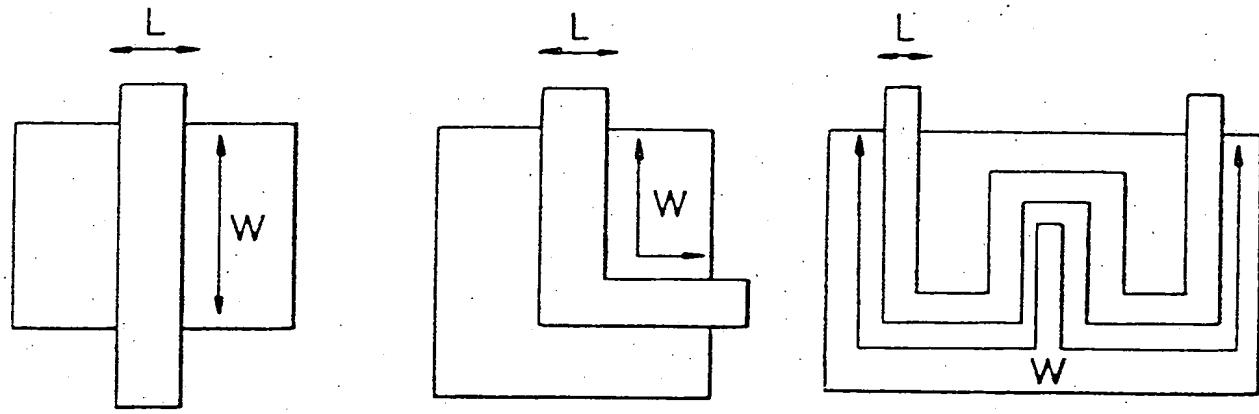


Fig. 6a

5/17

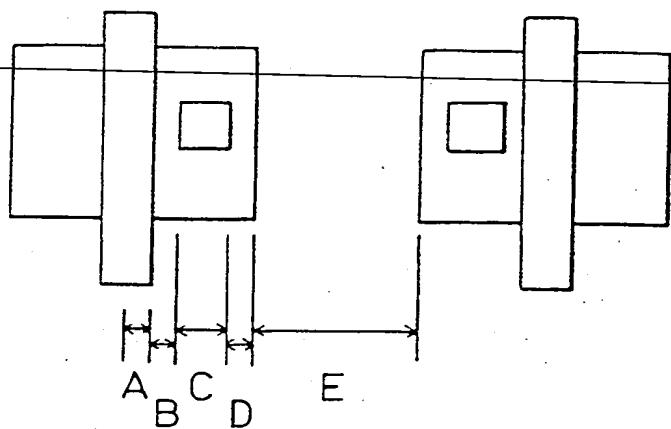


Fig. 6b

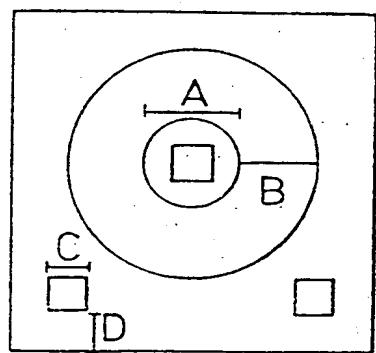


Fig. 6c

6/17

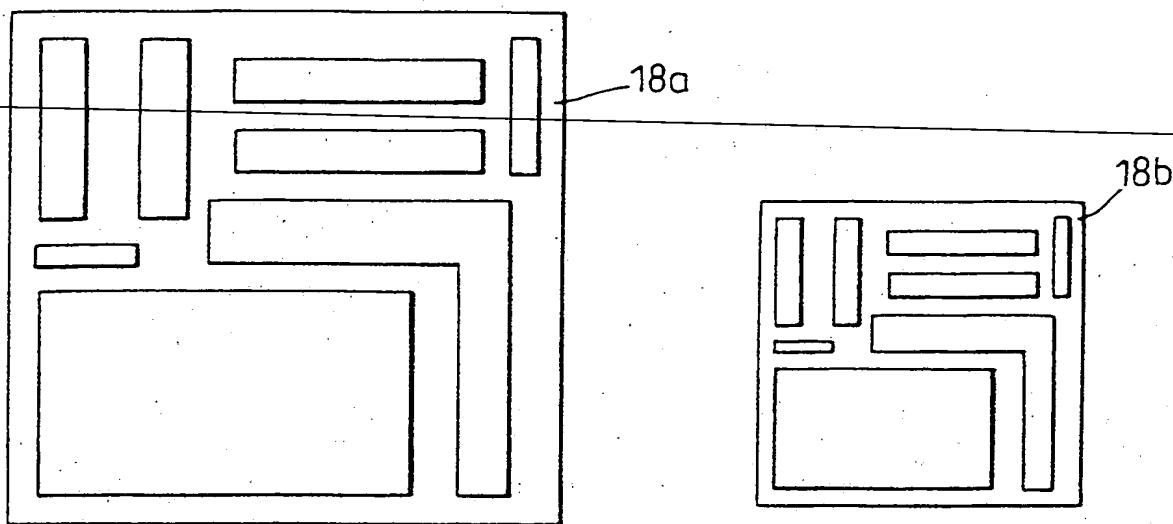


Fig. 7a

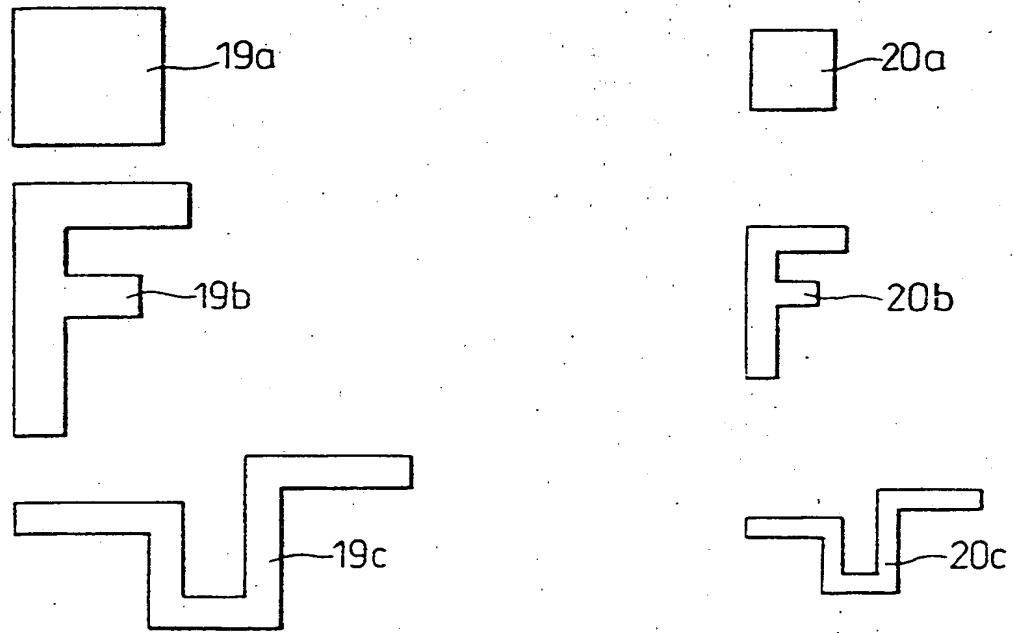


Fig 7b

7/17

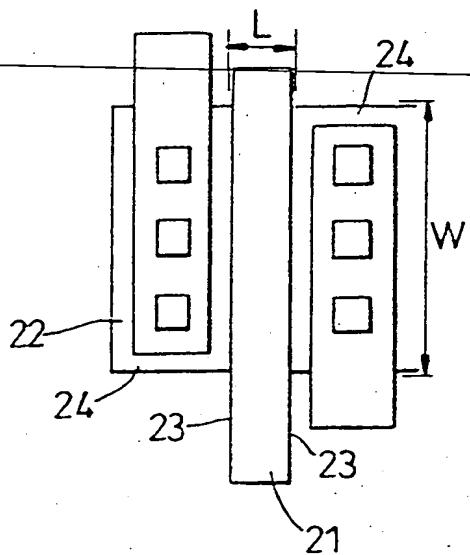


Fig. 8

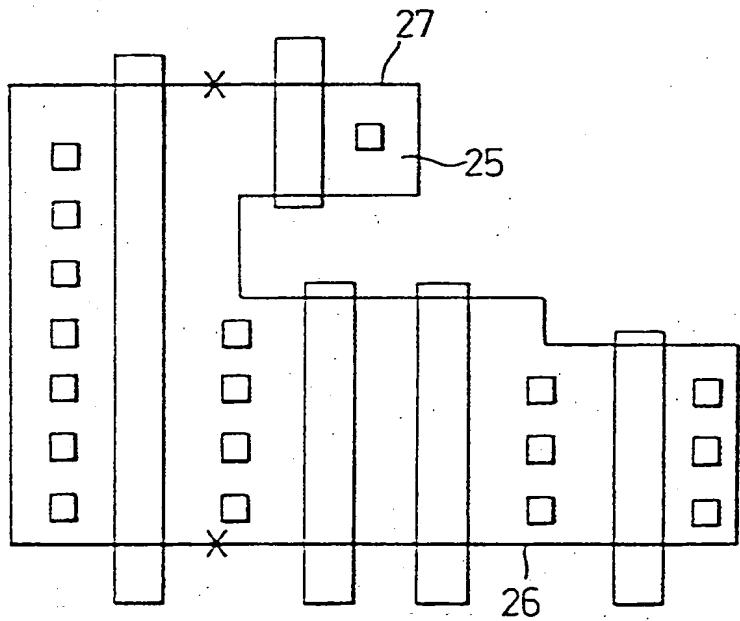


Fig 9

8/17

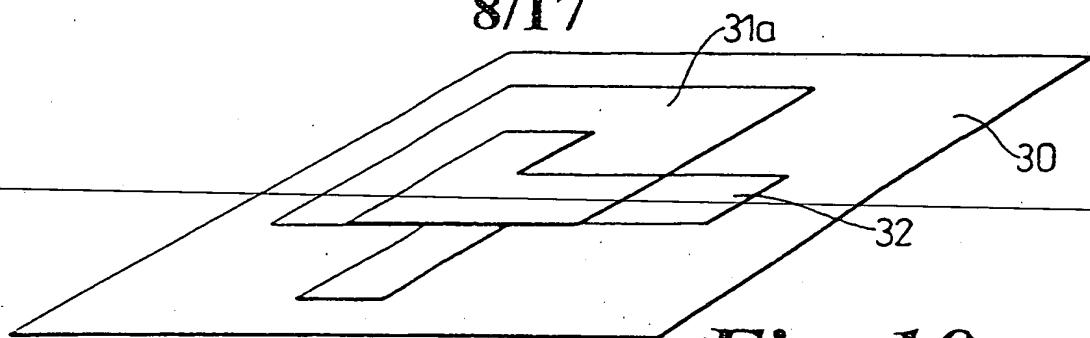


Fig. 10a

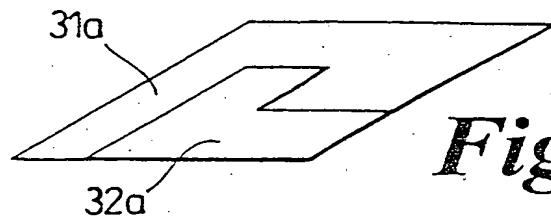


Fig. 10b

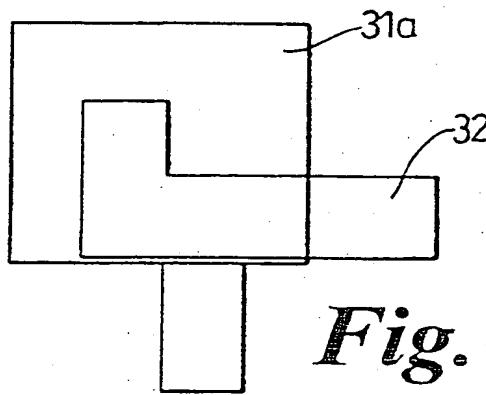


Fig. 10c

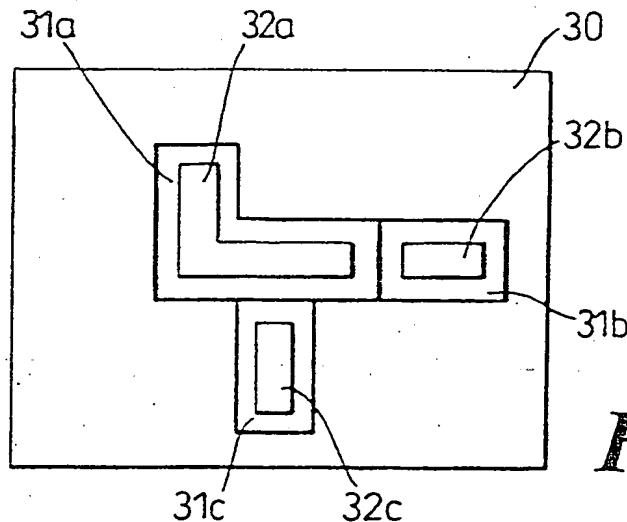


Fig 10d

9/17

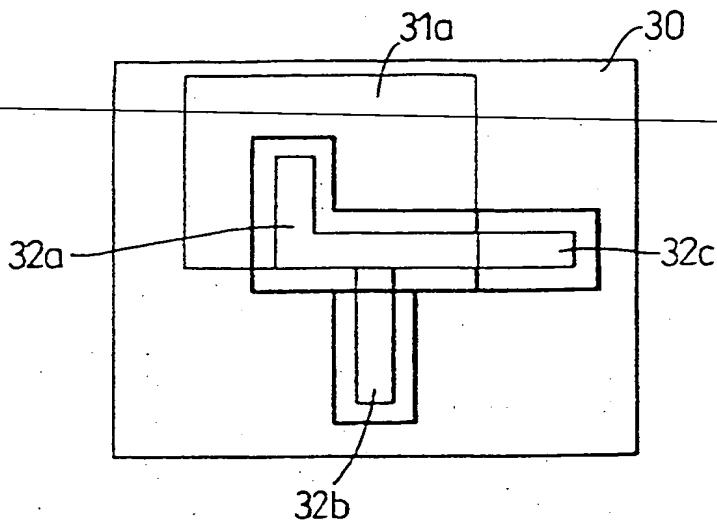


Fig. 11

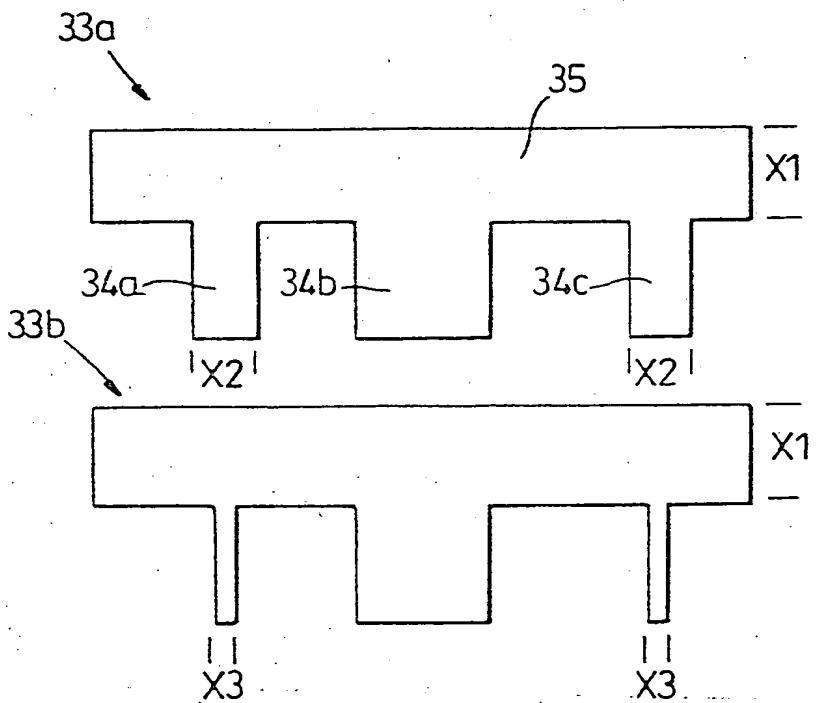


Fig. 12

10/17

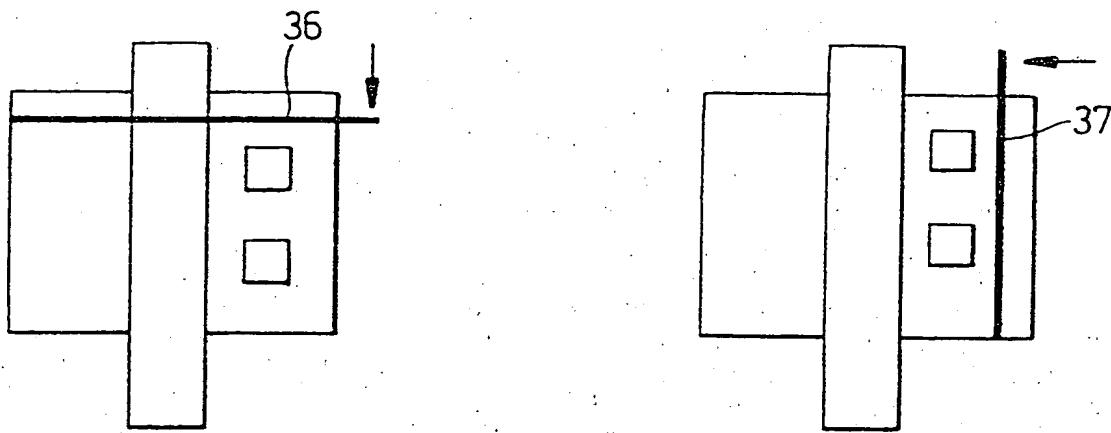


Fig. 13

11/17

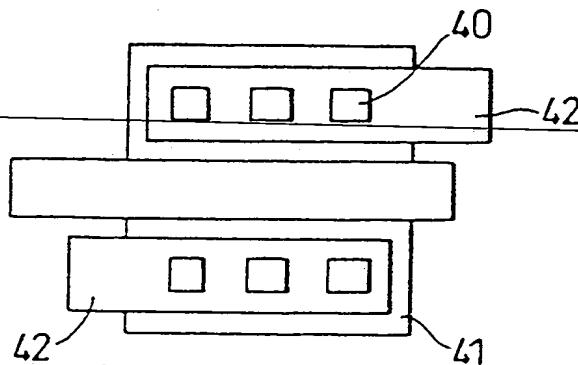


Fig. 14a

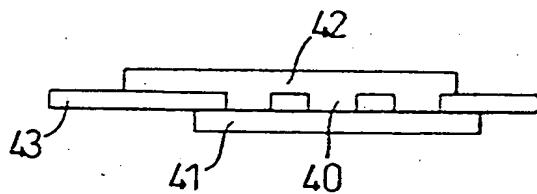


Fig. 14b

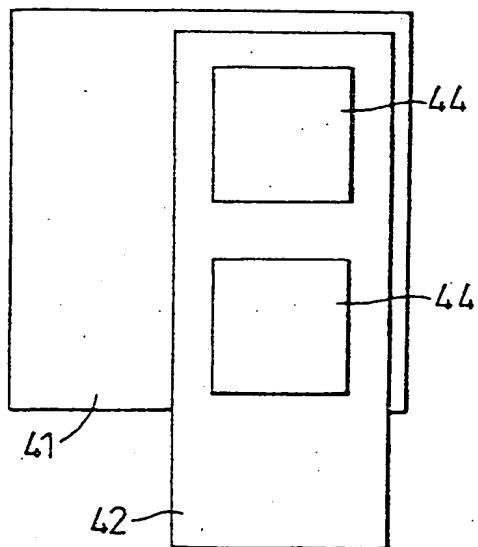


Fig 15a

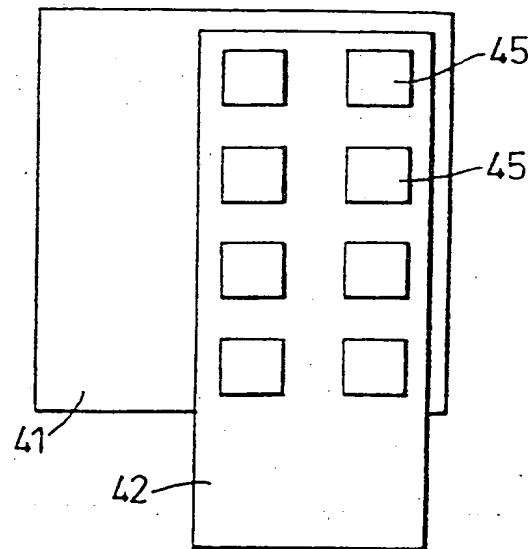


Fig 15b

12/17

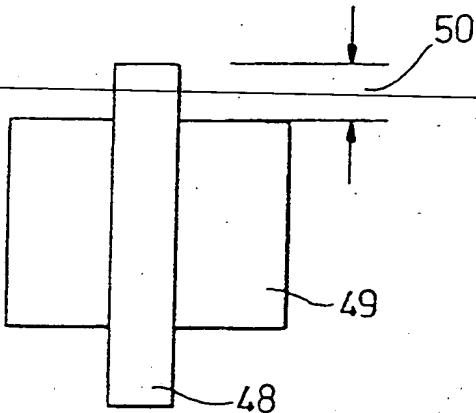


Fig. 16

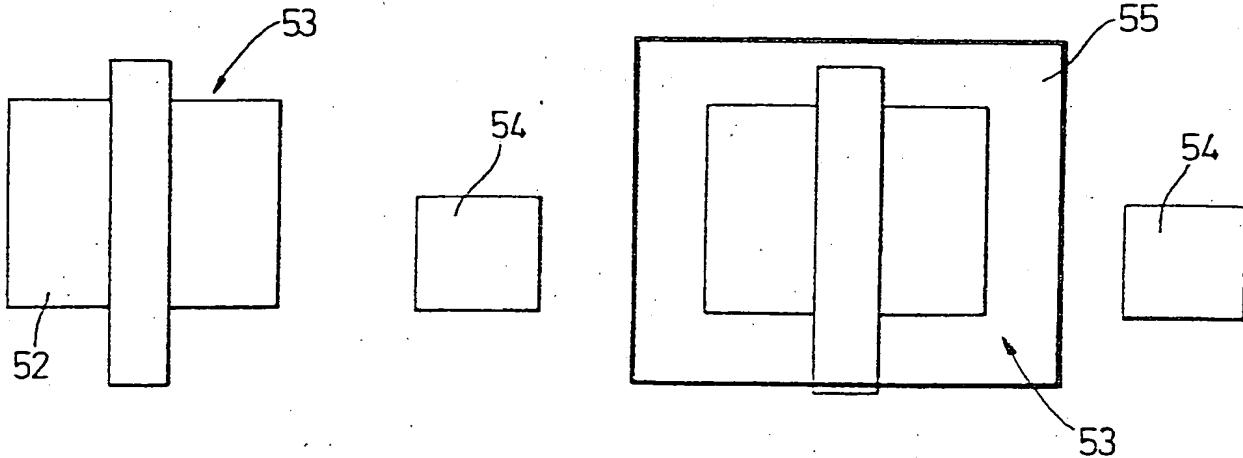


Fig. 17a

Fig. 17b

13/17

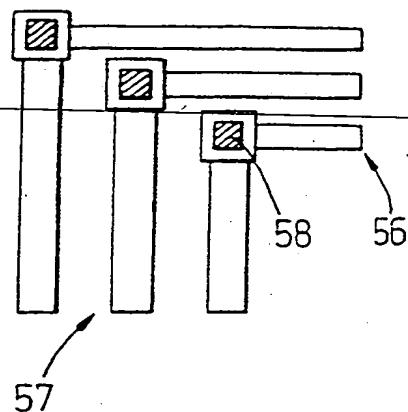


Fig. 18a

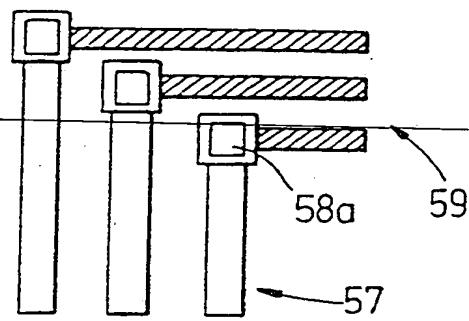


Fig. 18b

10/018867 PCT/GB00/02256

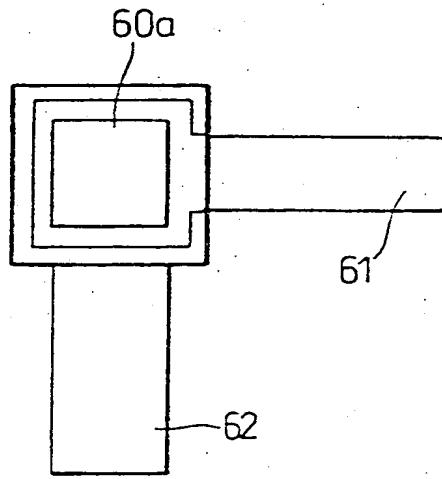


Fig. 19a

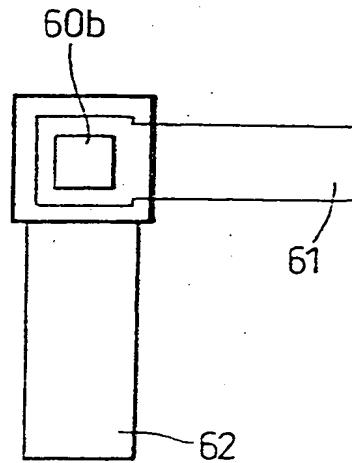


Fig. 19b

14/17

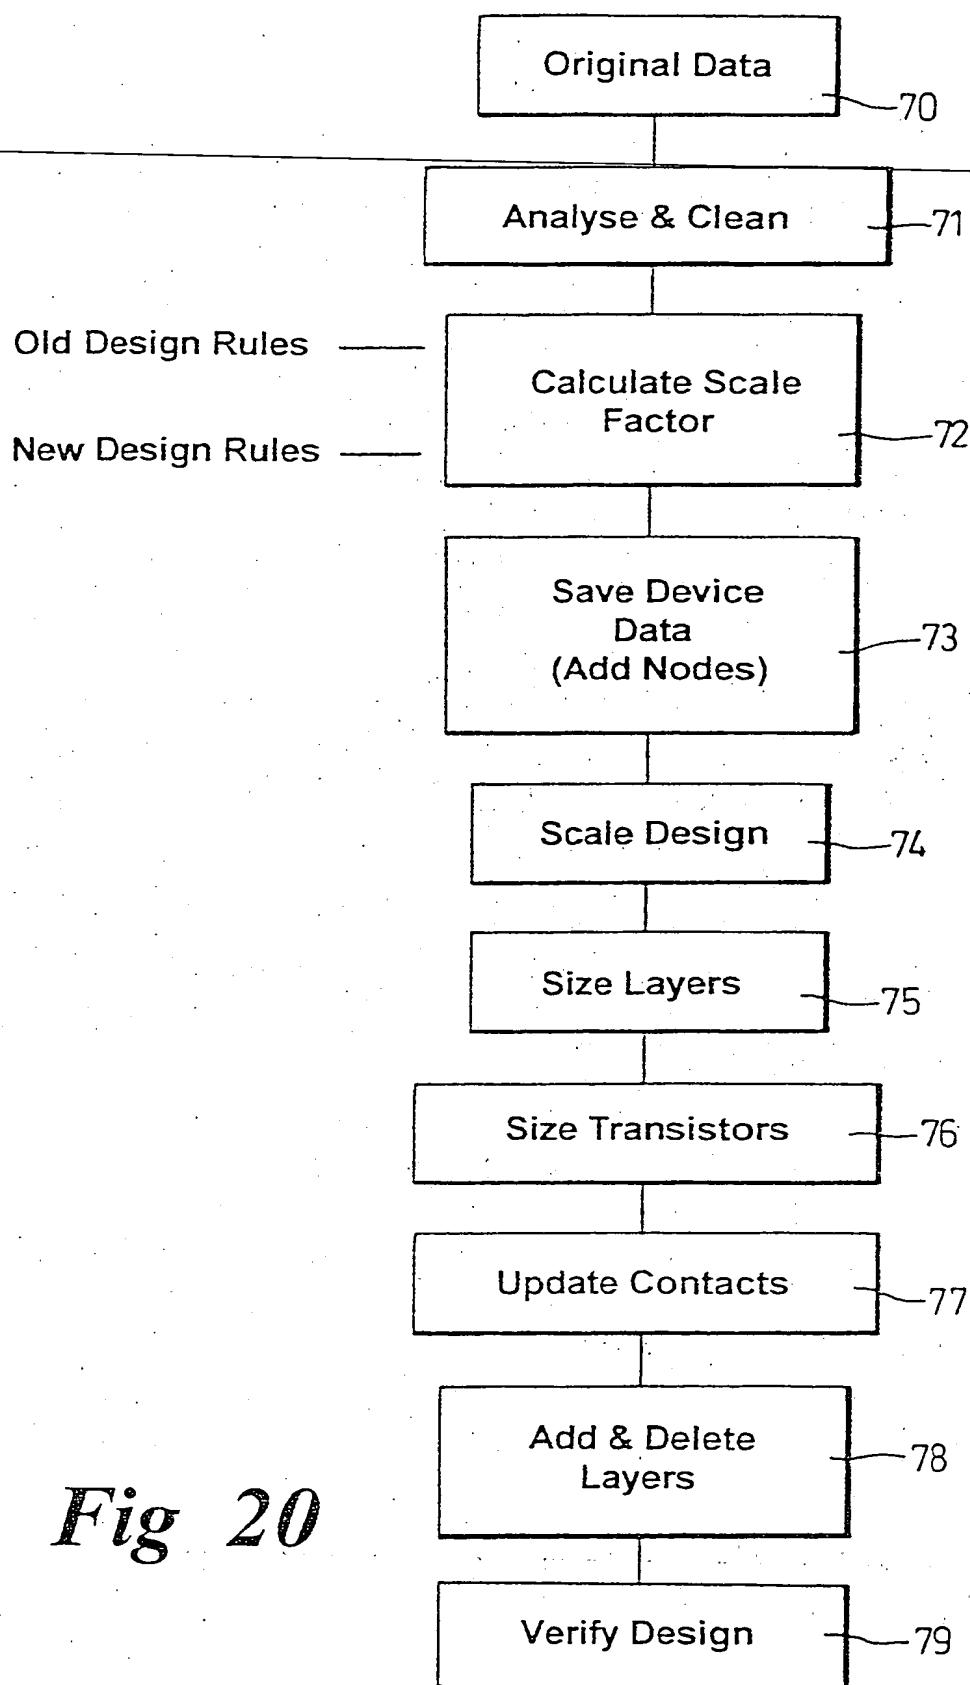


Fig 20

15/17


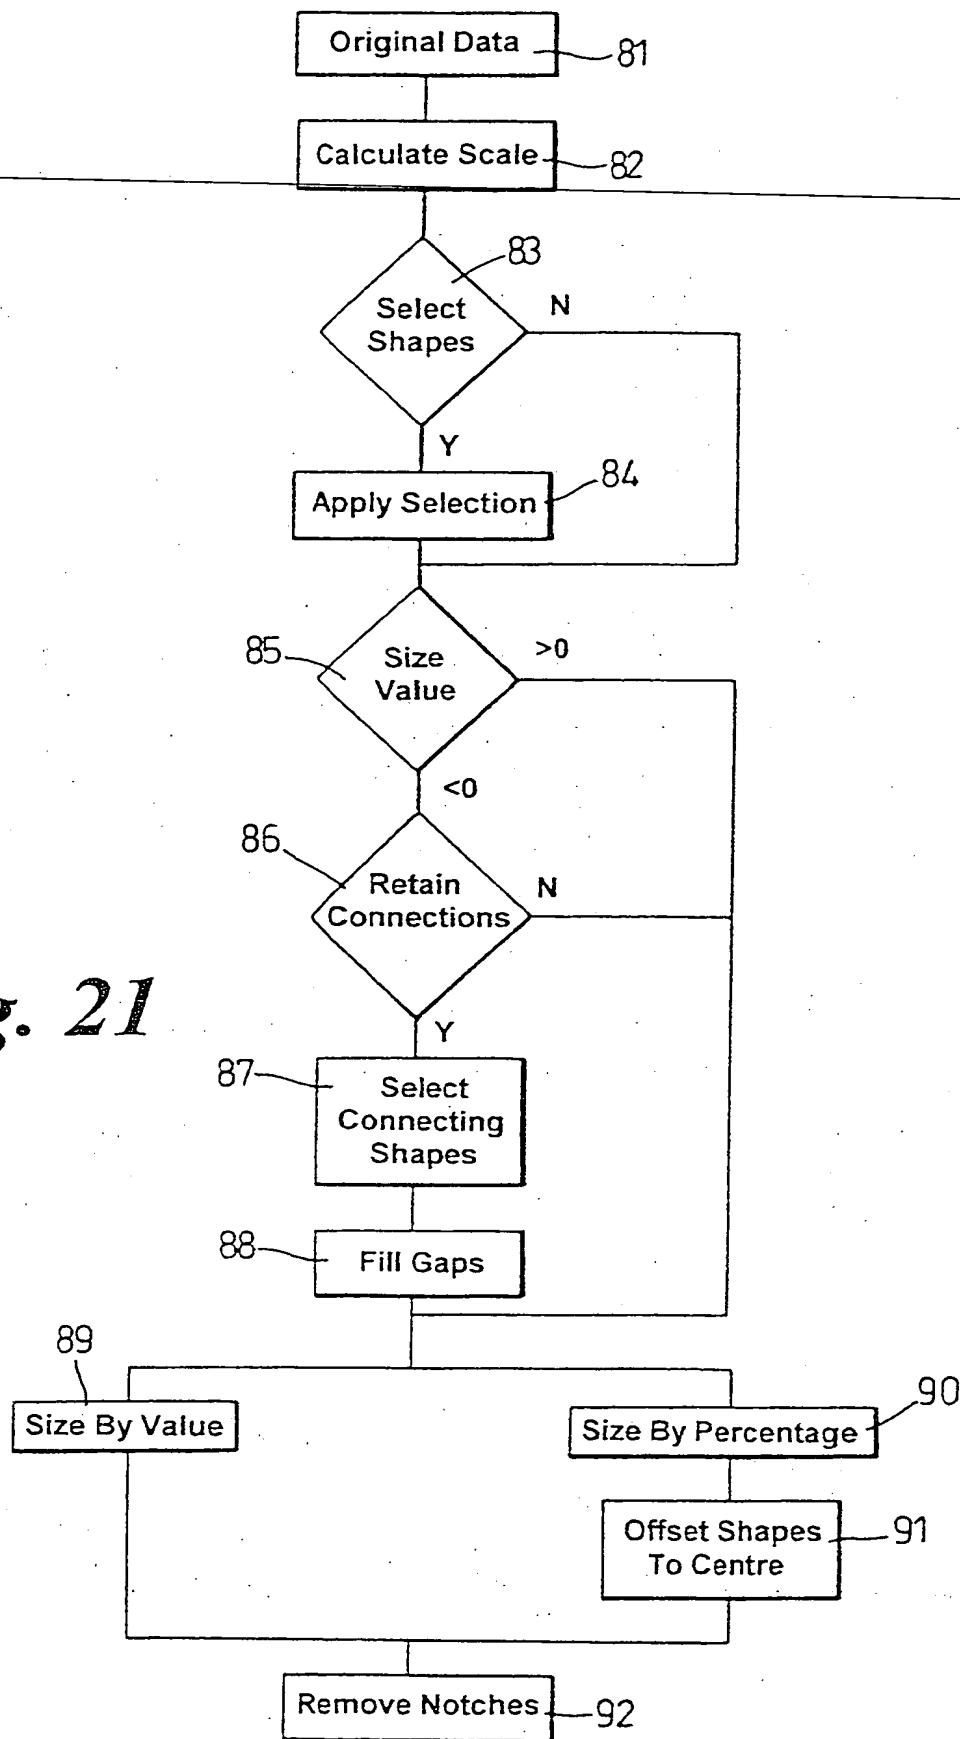



Fig. 21

16/17




Node Properties:

Width = $2.0\mu\text{m}$
Length = $0.5\mu\text{m}$
Type = "pmos"

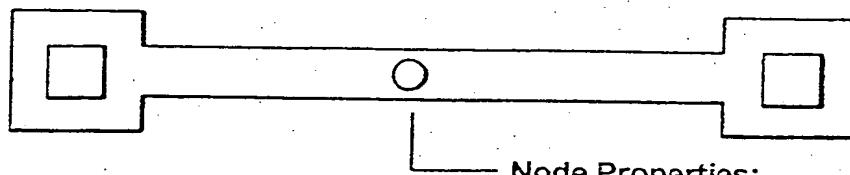Fig. 22a

Node Properties:

Width = $4.0\mu\text{m}$
Length = $25.0\mu\text{m}$
Value = 500 ohms
Type = "ndiffusion"

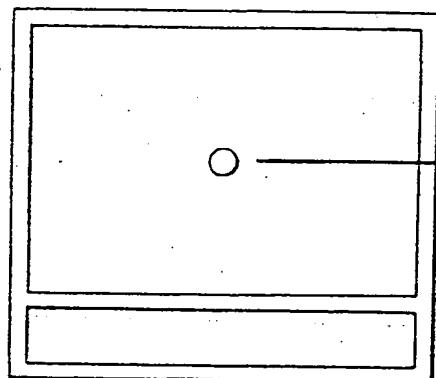Fig. 22b

Node Properties:

Width = $150\mu\text{m}$
Length = $110\mu\text{m}$
Area = $1550\mu\text{m}^2$
Value = 0.025pF
Type = "Metal/Polysilicon"

Fig 22c

17/17

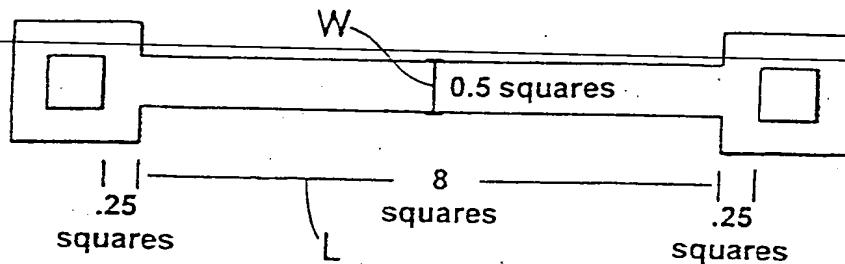


Fig. 23

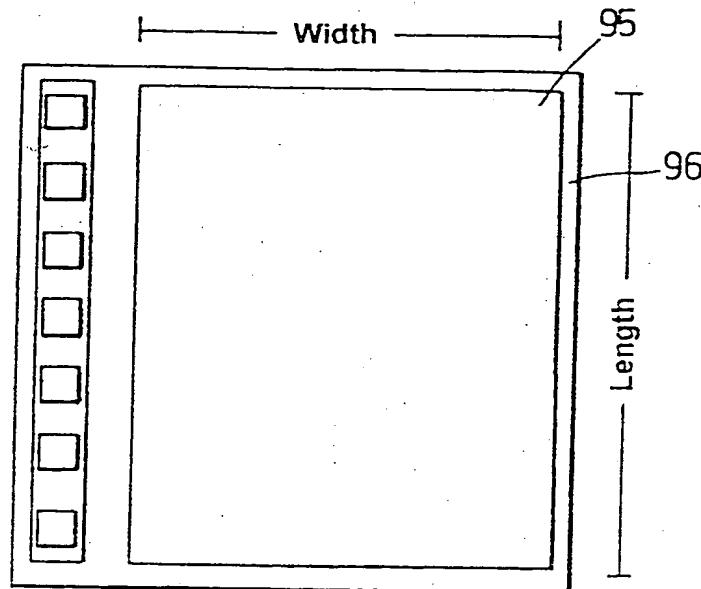


Fig. 24a

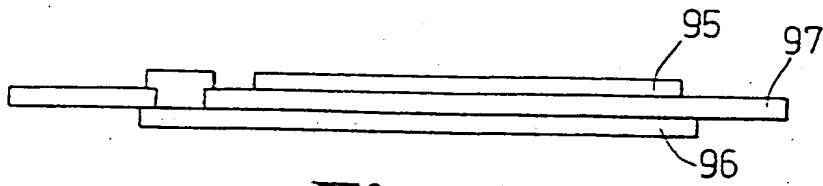


Fig. 24b